


ACFLC

Air displacement diffuser

The product is powder coated.

Standard color white (RAL9003).

The product specifies the maximum air volumes when air speed from distributor shall not exceed 0,3 m/s.

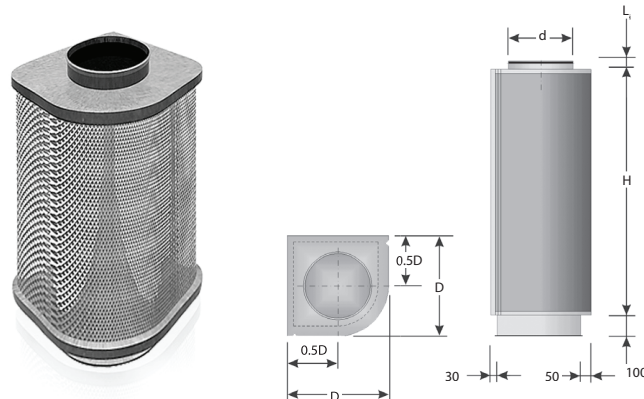

		H = 300 mm			H = 600 mm			H = 900 mm		
d, mm	D, mm	Air volume, m³/h	Code	Weight, kg	Air volume, m³/h	Code	Weight, kg	Air volume, m³/h	Code	Weight, kg
100	200	46	1021297	1,9	100	1021299	2,5	153	1021302	3,2
125	235	57	1021298	2,3	124	1021300	3,1	190	732322006	3,8
160	280				155	732322007	3,8	238	732322008	4,7
200	335				193	1021301	4,6	296	732322011	5,7
250	400							365	732322013	7,0
315	490							461	1021303	8,9
		H = 1200 mm			H = 1500 mm			H = 2000 mm		
d, mm	D, mm	Air volume, m³/h	Code	Weight, kg	Air volume, m³/h	Code	Weight, kg	Air volume, m³/h	Code	Weight, kg
160	280	321	1021304	5,6						
200	335	399	732322012	6,8						
250	400	492	1021305	8,3	620	732322015	9,6			
315	490	621	1021306	10,5	782	732322018	12,0			
400	600	779	732322019	13,2	980	1021307	15,1	1316	732322021	18,3
500	735	972	732322022	16,8	1223	1021308	19,1	1642	1021309	23,0

ORDER EXAMPLE: AIR displacement diffusers ACFLC-100-200-600.