


AKU-COMP

Flexible silencer

AKU-COMP-25

Material: perforated aluminium foil with steel spiral and 25 mm sound insulation covered with polyethylene.

Operational temperature: -10 / +80 °C.

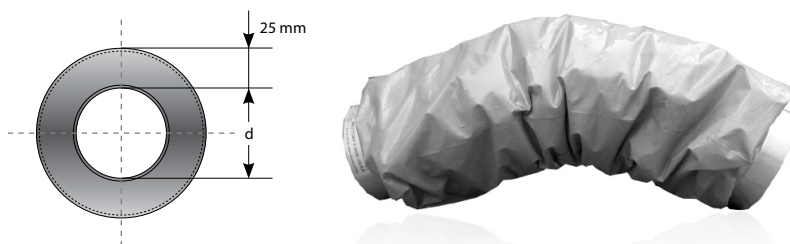


Diameter, mm		Efficiency S, dB, when frequency F						
d	L	125 Hz	250 Hz	500 Hz	1 kHz	2 kHz	4 kHz	8 kHz
100	0,6	21	31	27	24	20	9	7
	1,2	27	35	33	37	42	33	16
125	0,6	20	25	22	20	20	10	8
	1,2	30	34	29	34	40	38	17
160	0,6	14	20	19	17	17	8	6
	1,2	20	30	28	28	37	36	14
200	0,6	13	18	13	12	15	7	5
	1,2	20	30	23	24	35	23	14
250	0,6	15	17	12	12	17	7	5
	1,2	28	22	17	19	21	8	7
315	0,6	13	13	8	10	10	5	3
	1,2	21	18	15	17	17	8	6

d, mm	L = 0,6 m		L = 1,2 m	
	Code	Weight kg/pcs.	Code	Weight kg/pcs.
100	706000010	0,5	706000011	0,7
125	706000014	0,6	706000012	0,9
160	706000018	0,7	706000016	1,1
200	706000020	0,9	706000022	1,5
250	706000028	1,2	706000032	1,8
315	706055342	1,5	706000024	2,0

AKU-COMP-50

Material: perforated aluminium foil with steel spiral and 50 mm sound insulation covered with polyethylene.

Operational temperature: -10 / +80 °C.

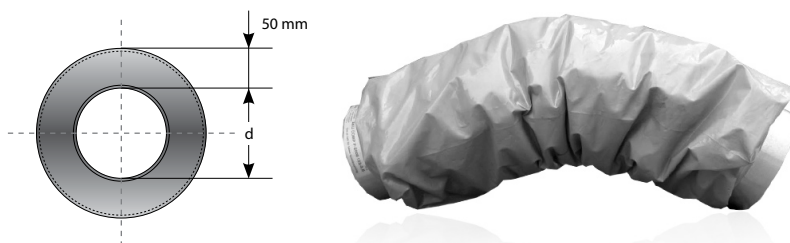

Diameter, mm		Code	Efficiency S, dB, when frequency F						
d	L		125 Hz	250 Hz	500 Hz	1 kHz	2 kHz	4 kHz	8 kHz
100	1,2	1113750	27	35	33	37	42	33	16
125	1,2	1113758	30	34	29	34	40	38	17
160	1,2	1113762	20	30	28	28	37	36	14
200	1,2	1113765	20	30	23	24	35	23	14