

AMFLC


Air displacement diffuser

The product is powder coated.

Standard color white (RAL9003).

The product specifies the maximum air volumes when air speed from distributor shall not exceed 0,3 m/s.

$L_1 = 40 \text{ mm}$ (100÷315), $L_1 = 65 \text{ mm}$ (355÷735).

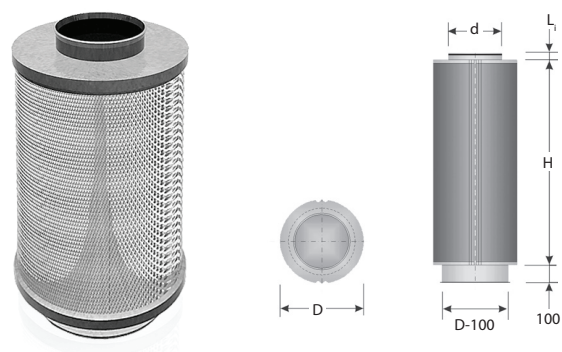

		H = 300 mm			H = 600 mm			H = 900 mm		
d, mm	D, mm	Air volume, m³/h	Code	Weight, kg	Air volume, m³/h	Code	Weight, kg	Air volume, m³/h	Code	Weight, kg
100	200	88	732320001	1,6	170	1021282	2,1			
125	235	108	1021281	1,9	232	1021283	2,6	265	732320005	3,2
160	280				286	1021284	3,2	434	1021286	3,9
200	335				353	1021285	3,9	542	732320010	4,8
250	400							664	732320012	5,9
315	490							832	732320015	7,4
		H = 1200 mm			H = 1500 mm			H = 2000 mm		
d, mm	D, mm	Air volume, m³/h	Code	Weight, kg	Air volume, m³/h	Code	Weight, kg	Air volume, m³/h	Code	Weight, kg
160	280	580	1021287	4,7						
200	335	679	732320011	5,7						
250	400	895	732320013	7,0	1060	732320014	8,0			
315	490	1122	732320016	8,7	1412	1021290	10,0			
400	600	1399	1021288	11,0	1761	1021291	12,6	2364	732320020	15,2
500	735	1739	1021289	13,8	2189	732320022	15,8	2939	732320023	19,0

ORDER EXAMPLE: air displacement diffusers AMFLC-100-200-600.