

AMVFR, AMVFRN

Kitchen hood with grease filters

AMVFRN-d-B-L-H stainless steel.

AMVFR-d-B-L-H galvanized steel.


$L_1 = 40 \text{ mm}$ (100÷315), $L_1 = 65 \text{ mm}$ (355÷800).

Maximum allowable air flow rate through the grease filter

$VF = 1 \text{ m/s}$.

Sheet joints are riveted.

We recommend to wash grease filters with degreasing agent at least once a week. Soak the filters when they are still hot.

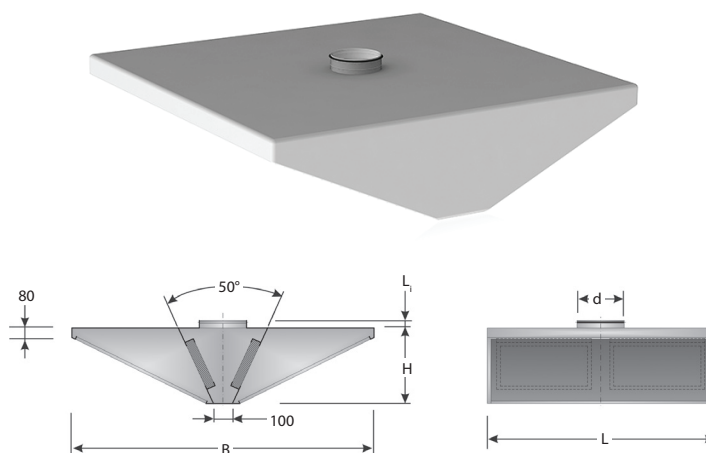

L	d, mm	B, mm	H, mm	Type and number of grease filters, psc.	Air volume, m³/h	Weight with grease filters, kg	Δ Pa, clean-dirty	Code
AMVFRN								
900 1200 1500 1800 2100	200	1600	400	RF-212 (×2)	900	29,0	36-97	708000092
	315	1600	400	RF-212 (×4)	1800	40,0	30-91	708010005
	315	1600	400	RF-212 (×4)	1800	46,0	30-91	708064196
	250 (×2)	1600	400	RF-212 (×6)	2700	57,0	35-96	708016967
	250 (×2)	1600	400	RF-212 (×6)	2700	63,0	35-96	708024752
	315	1600	600	RF-222 (×2)	1800	39,0	30-91	1021414
	400	1600	600	RF-222 (×4)	3600	55,0	36-97	1019322
	400	1600	600	RF-222 (×4)	3600	62,0	36-97	1021417
	355 (×2)	1600	600	RF-222 (×6)	5400	79,0	35-96	708064200
	355 (×2)	1600	600	RF-222 (×6)	5400	86,0	35-96	1021420
AMVFR								
900 1200 1500 1800 2100	200	1600	400	RF-212 (×2)	900	32,0	36-97	708164202
	315	1600	400	RF-212 (×4)	1800	44,0	30-91	708164203
	315	1600	400	RF-212 (×4)	1800	51,0	30-91	1021408
	250 (×2)	1600	400	RF-212 (×6)	2700	63,0	35-96	708164204
	250 (×2)	1600	400	RF-212 (×6)	2700	69,0	35-96	708125193
	315	1600	600	RF-222 (×2)	1800	43,0	30-91	1021409
	400	1600	600	RF-222 (×4)	3600	60,0	36-97	1021410
	400	1600	600	RF-222 (×4)	3600	68,0	36-97	1021411
	355 (×2)	1600	600	RF-222 (×6)	5400	85,0	35-96	1021412
	355 (×2)	1600	600	RF-222 (×6)	5400	93,0	35-96	1021413

ORDER EXAMPLE: kitchen hood AMVFRN-200-1600-900-400.