


ASGS

Circular low-built silencer

S – solid mineral wool plate covered by glass fibre.

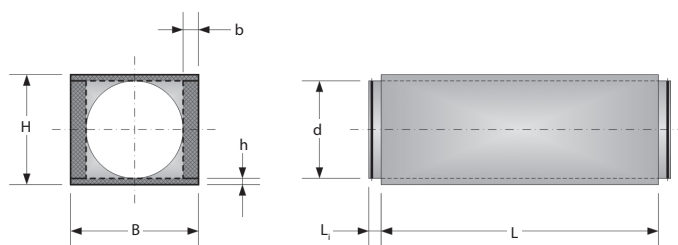

Dimensions, mm		Efficiency S, dB, at frequency F							
d	L	63 Hz	125 Hz	250 Hz	500 Hz	1 kHz	2 kHz	4 kHz	8 kHz
100	600	8	8	11	21	27	27	26	15
	900	10	11	14	26	34	34	34	19
125	600	7	6	9	17	23	23	22	12
	900	9	8	12	23	31	30	29	16
	1200	11	10	15	28	38	37	36	20
160	600	5	5	7	14	20	20	18	10
	900	7	6	9	19	27	27	25	14
	1200	9	8	12	23	34	34	31	17
200	600	5	4	6	11	16	15	14	8
	900	6	5	8	15	23	20	20	11
	1200	8	7	10	20	29	26	25	14
250	600	4	3	5	9	13	11	11	7
	900	5	4	7	13	18	16	15	9
	1200	7	5	9	16	23	20	19	12
315	600	3	2	4	7	10	8	7	5
	900	4	3	6	10	14	11	10	7
	1200	6	4	7	13	19	14	12	9
400	900	4	3	5	8	11	7	6	5
	1200	5	3	6	10	14	10	7	7
500	900	6	4	8	12	17	10	8	7
	1200	8	5	11	16	22	13	11	10
630	900	4	3	7	9	11	6	6	4
	1200	6	4	9	11	14	8	8	6

Dimensions, mm						L = 600 mm		L = 900 mm		L = 1200 mm	
d	L ₁	b	B	h	H	Code	Weight, kg	Code	Weight, kg	Code	Weight, kg
100	40	50	200	20	140	354274021	3,3	706461445	4,7		
125	40	50	225	20	165	354274022	3,9	706461455	5,5	706038814	7,0
160	40	50	260	20	200	706461456	4,7	354274046	6,6	706038815	8,4
200	40	50	300	20	240	354274063	5,6	354274062	7,8	354274066	10,0
250	40	50	350	20	290	354274072	6,8	354274070	9,4	354274082	12,0
315	40	50	415	20	355	706010001	8,3	354274092	11,5	354274096	14,7
400	65	50	500	20	440			354274102	14,3	354274106	18,2
500	65	100	700	50	600			354274112	24,6	354274116	31,2
630	65	100	830	50	730			1037904	30,2	354274126	38,2

ORDER EXAMPLE: silencer ASGS-100-600-S.