

## AWVFR, AWWFRN

### KITCHEN HOOD WITH GREASE FILTERS

AWVFRN-d-B-L-H stainless steel.

AWVFR-d-B-L-H galvanized steel.


Li = 40 mm (100÷315), Li = 65 mm (355÷800).

Maximum allowable air flow rate through the grease filter

VF = 1 m/s.

Sheet joints are riveted.

We recommend to wash grease filters with degreasing agent at least once a week. Soak the filters when they are still hot.

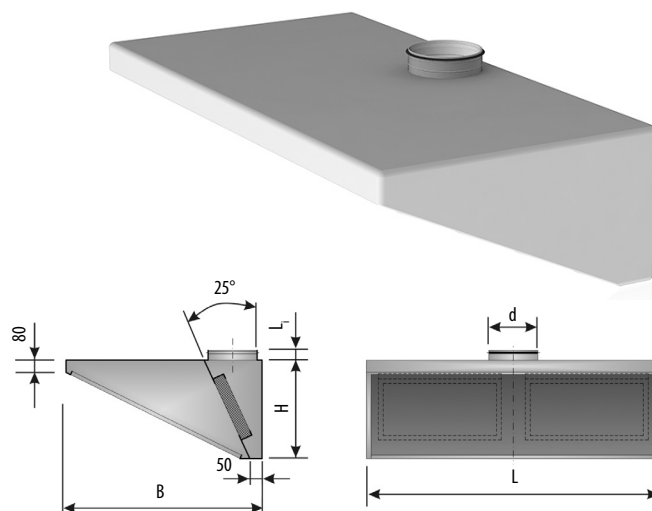

L	d, mm	B, mm	H, mm	Type and number of grease filters, psc.	Air volume, m <sup>3</sup> /h	Weight with grease filters, kg	Δ Pa, clean-dirty	Code
AWVFRN								
900 1200 1500 1800 2100	160	800	400	RF-212 (×1)	450	14	30-91	708016964
	200	800	400	RF-212 (×2)	900	19	36-97	708016961
	200	800	400	RF-212 (×2)	900	28	36-97	708016962
	200 (×2)	800	400	RF-212 (×3)	1350	34	29-90	708055408
	200 (×2)	800	400	RF-212 (×3)	1350	38	29-90	708016969
	200	800	600	RF-222 (×1)	900	19	36-97	708055539
	315	800	600	RF-222 (×2)	1800	27	30-91	708064182
	315	800	600	RF-222 (×2)	1800	38	30-91	1018385
	250 (×2)	800	600	RF-222 (×3)	2700	47	35-96	708056410
	250 (×2)	800	600	RF-222 (×3)	2700	52	35-96	708000105
AWVFR								
900 1200 1500 1800 2100	160	800	400	RF-212 (×1)	450	15	30-91	1021391
	200	800	400	RF-212 (×2)	900	21	36-97	708145661
	200	800	400	RF-212 (×2)	900	30	36-97	708154983
	200 (×2)	800	400	RF-212 (×3)	1350	37	29-90	708153543
	200 (×2)	800	400	RF-212 (×3)	1350	42	29-90	708153544
	200	800	600	RF-222 (×1)	900	21	36-97	1021392
	315	800	600	RF-222 (×2)	1800	30	30-91	1021394
	315	800	600	RF-222 (×2)	1800	42	30-91	708164185
	250 (×2)	800	600	RF-222 (×3)	2700	52	35-96	1021393
	250 (×2)	800	600	RF-222 (×3)	2700	57	35-96	1021395