



Domekt CF 200 F C8 E0

Maximal air flow, m³/h	173
Maximal air flow, l/s	48
Reference flow rate, m³/s	0,034
Reference pressure difference, Pa	50
SPI, W/(m³/h)	0,24
Thermal efficiency of heat recovery, %	85
Supply voltage, V	1~230
Maximal operating current E0, A	0,9
Power supply cable, mm²	3×1,5
Electric power input of the fan drive at maximum flow rate, W	41
Electric power input of the fan drive at reference flow rate, W	15
Noise power level, L _{WA} , dB(A)	42
Noise pressure level, L _{PA} , dB(A), (3 m)	31
Filters dimensions B×H×L, mm	165×280×22
Supply filter class	ePM1 60 (F7)
Exhaust filter class	ePM10 50 (M5)
Unit dimensions B×H×L, mm	660×205×965
Maintenance space, mm	660
Unit weight, kg	33



Performance

Unit with standard equipment

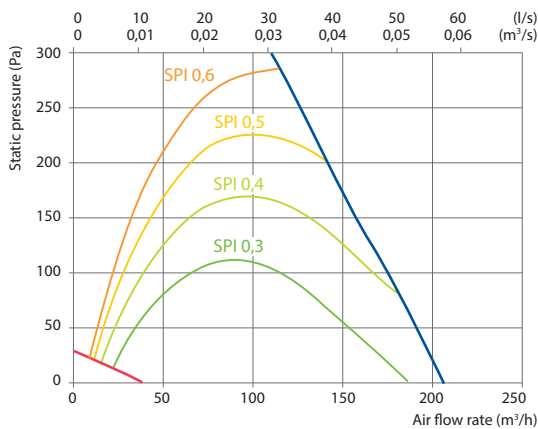

Accessories

Closing damper	AGUJ-M-160+LF230/CM230
Silencer	ODA/ETA ASTS-160-600-M
	SUP/EHA ASTS-160-900-M
Electric preheater	EHC-SI/FC/K (-10...+20°C)
Indoor/Outdoor grill	LD-160

Mounting positions




Temperature efficiency

	Winter					Summer		
Outdoor temperature, °C	-23	-15	-10	-5	0	25	30	35
After heat exchanger, °C	15,3	16,5	17,3	18	18,7	22,4	23,2	23,9


indoor +22 °C, 20 % RH

Shown as right (R1)

View from inspection side

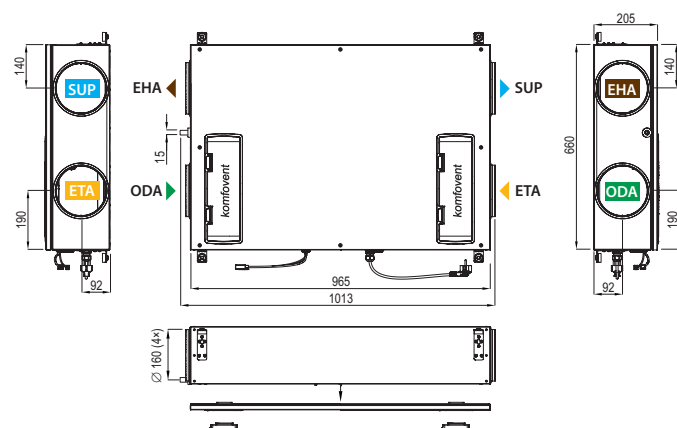

Shown as left (L1)

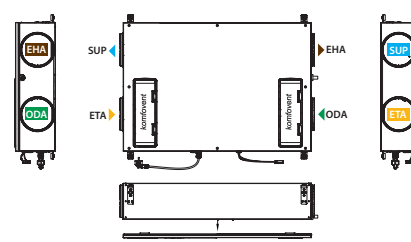

ODA – outdoor intake SUP – supply air ETA – extract indoor EHA – exhaust air