


# DPSS



## Connection box

Box is acoustically insulated with condensation protection, without adjusting damper.

Insulation – 20 mm mineral wool.

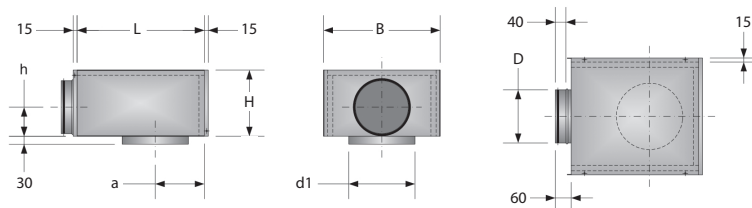

Sound power level at input x correction factor = sound power level at output ( $60 \times 0.82 = 49 \text{ dB(A)}$ ).

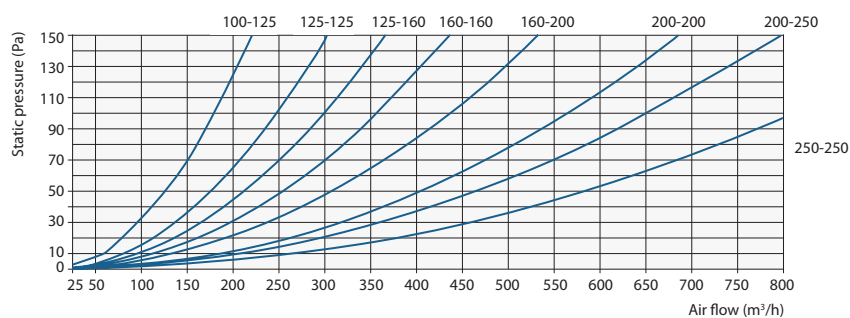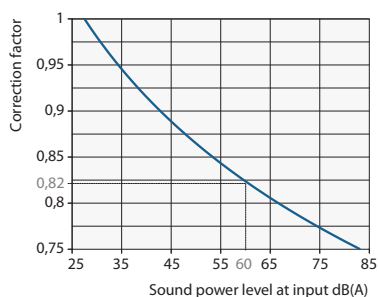

Model	Dimensions, mm					DPSS	
	D	d1	B×H×L	a	h	Code	Weight, kg
DPSS-100-125	100	125	265×160×280	122,5	70	709100076	1,8
DPSS-125-125	125	125	265×160×280	122,5	70	709100081	1,9
DPSS-125-160	125	160	265×160×280	140	70	709100077	1,9
DPSS-160-160	160	160	340×195×400	140	90	709100082	3,1
DPSS-160-200	160	200	340×195×400	160	90	709100078	3,1
DPSS-200-200	200	200	440×250×480	160	110	709100083	4,8
DPSS-200-250	200	250	440×250×480	185	110	709100079	4,8
DPSS-250-250	250	250	540×300×540	185	135	709100084	6,6

ORDER EXAMPLE: connection box DPSS-100-125.