


ELiS-T

Industrial air curtain

Air curtains case is lightweight, resistant to corrosion, made of EPP (polypropylene foam) material.

Mounted both horizontally and vertically.

The air curtains meets the IP21 protective class. Recommended installation height up to 4 m.

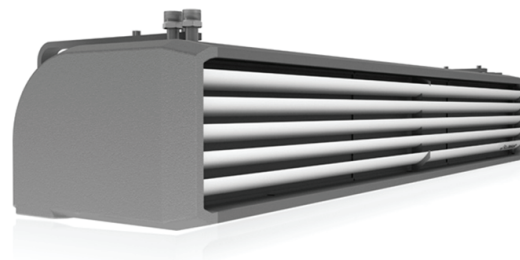

Model	Air flow, m³/h	Length, m	Heating type	Power consumption, kW	Code	Weight, kg
ELiS T-E-100	2300	1,0	Electric	7,1	763000083	24,0
ELiS T-E-150	3900	1,5	Electric	11,1	763000082	31,5
ELiS T-E-200	5100	2,0	Electric	15,1	763000078	37,0
ELiS T-W-100	2300	1,0	Hot water	11,1*	1020792	22,9
ELiS T-W-150	3900	1,5	Hot water	20,2*	763000093	30,7
ELiS T-W-200	5100	2,0	Hot water	27,4*	763000077	35,9
ELiS T-W-100 2R	2100	1,0	Hot water	19,5*	1020804	25,1
ELiS T-W-150 2R	3700	1,5	Hot water	36,1*	1020805	34,4
ELiS T-W-200 2R	4900	2,0	Hot water	49,3*	1020806	40,7

* Specified power for air temperature +18°C and water temperature 90/60°C.

ORDER EXAMPLE: air curtain ELiS T-E-100.

Accessories

Model	Description	Code
KRON T	Mounting bracket for ELiS T/A/DUO air curtains	1020809
KRON T VERTICAL	Mounting bracket for vertical ELiS T air curtains	1020810
TS	3-step fan speed regulator with built-in room thermostat	744230922
DCet	Magnetic door contact with relay box	1001766
T-box	Intelligent controller with touch screen, fan speed regulator with built-in room thermostat and programable week calendar	1020814