



ICM

Circular duct mounted tube fan

ICM fan housing made of polypropylene, impeller – ABS plastic.

Technological highlights:

- adjustable speeds,
- motor meets the IP 44 protection class,
- with termo protection,
- with ball bearings.

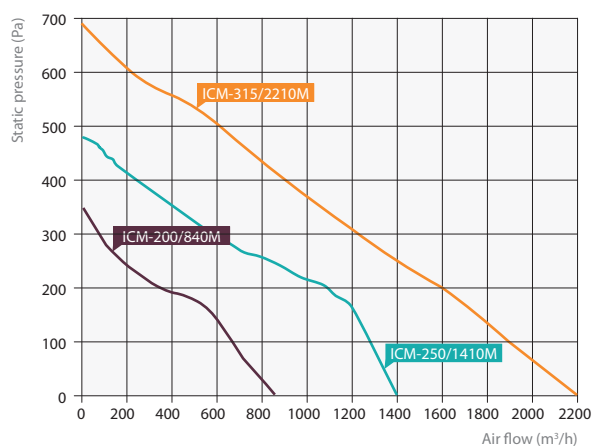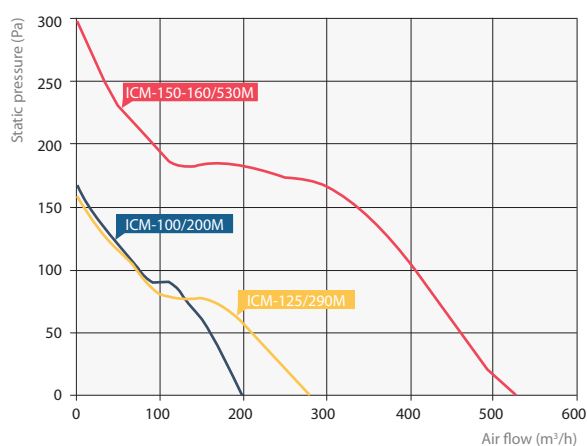

Model	Sound pressure, dB(A)	Max. current consumption, A	Voltage, V	Power consumption, W	Code	Weight, kg
ICM-100/200 M	31	0,12	1~ 230	26	721000407	2,0
ICM-125/290 M	31	0,14	1~ 230	33	721000408	1,8
ICM-160/530 M	33	0,24	1~ 230	54	721000409	2,7
ICM-200/840 M	63	0,57	1~ 230	128	721000410	4,9
ICM-250/1410 M	66	1,2	1~ 230	225	721000411	7,5
ICM-315/2210 M	69	1,9	1~ 230	390	721000412	11,3

2 steps switches	5 steps motor rotation speed controller
PJ-3	RV-0.6B
PJ-3	RV-0.6B
PJ-3	RV-0.6B
PJ-3	RV-0.6B
PJ-3	RV-1.5
PJ-3	RV-2.2

ORDER EXAMPLE: fan ICM-100/200 M.