


ISOR

Circular connection duct acoustically insulated fans

Fans housings made of galvanized steel sheet and covered by sound absorbing material.

Technological highlights:

- backward curved blades,
- acoustically insulated,
- integrated thermo protection or thermo contacts (ISOR-450, ISOR-500),
- fan section removable,
- speed controllable,
- motor meets the IP 54 protection class, insulation class – F.

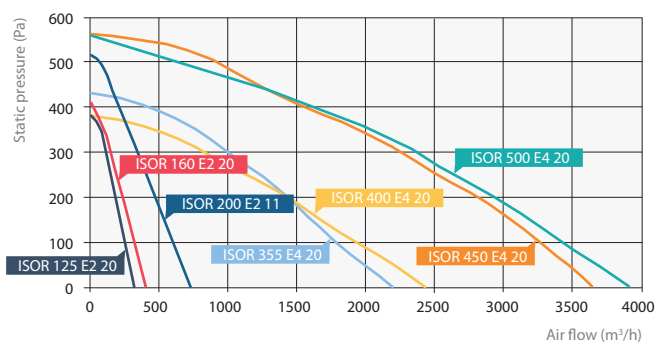

Model	Max. current consumption, A	Voltage, V	Power consumption, W	Code	Weight, kg	5 steps motor rotation speed controller
ISOR-125 E2 20	0,31	1~ 230	50	721500361	11,6	RV-0.6B
ISOR-160 E2 20	0,31	1~ 230	49	1021808	11,8	RV-0.6B
ISOR-200 E2 11	0,46	1~ 230	100	722000245	17,6	RV-0.6B
ISOR-355 E4 20	1,3	1~ 230	237	721500349	41,8	RV-1.5
ISOR-400 E4 20	1,3	1~ 230	242	1021814	41,0	RV-1.5
ISOR-450 E4 20	2,6	1~ 230	451	721500363	67,5	RV-3.0
ISOR-500 E4 20	2,7	1~ 230	466	721500364	69,5	RV-3.0

ORDER EXAMPLE: fan ISOR-125 E2 20.