


LEO FB EPP

Hot water air heater

For heating of industrial, commercial and other large premises.

Technology accents:

- three-speed AC motors,
- EPP (polypropylene foam) casing,
- meets the IP54 protective class,
- can be mounted both horizontally and vertically.

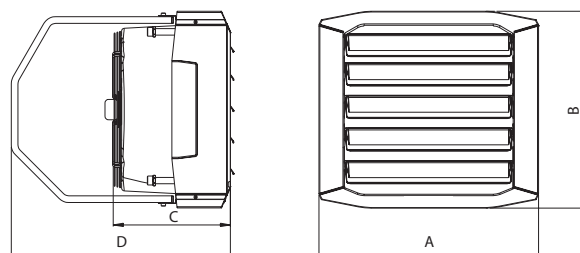

Model	Maximum air flow, m ³ /h	Voltage, V/Hz	Heating power consumption, kW*	Sound pressure, dB(A)**	Dimensions, mm				Code	Weight, kg
					A	B	C	D		
LEO S1	2300	230/50	6,9	56,3	550	480	345	545	1083858	9,5
LEO S2	2000	230/50	14,7	56,3	550	480	345	545	1083859	10,4
LEO S3	1800	230/50	18,0	56,3	550	480	345	545	1083860	10,8
LEO L1	4250	230/50	17,6	64,1	650	580	355	650	1083861	14,9
LEO L2	3800	230/50	27,8	64,1	650	580	355	650	1083862	16,2
LEO L3	3400	230/50	36,4	64,1	650	580	355	650	1083863	17,8
LEO XL2	5800	230/50	52,3	67,5	830	680	475	750	1083864	23,2
LEO XL3	5300	230/50	67,8	67,5	830	680	475	750	1083865	26,2

* Water temperature 80/60°C; air temperature 10°C.

** Sound pressure level is measured at a distance of 5 m from the unit and is specified at maximum output in 1500 m² room.

ORDER EXAMPLE: air curtain LEO FB EPP 10 3V.

Accessories



TS



HMI

Model	Description	Code
T-box	Intelligent controller with touch screen, fan speed regulator with built-in room thermostat and programable week calendar	1020814
TS	3-step fan speed regulator with built-in room thermostat	744230922
HMI	3-step fan speed regulator with built-in room thermostat and programable week calendar	1020019