



MPC

Square acoustically insulated fan

Fans housings made of galvanized steel sheet, covered 30 mm. thick layer of insulation.

Technological highlights:

- acoustically insulated,
- maximum air temperature 80 °C,
- adjustable rotational speed,
- with fat/condensate collection tray,
- motor meets the IP 54 protection class, insulation class – F,
- possibility to change the fan outlet location.

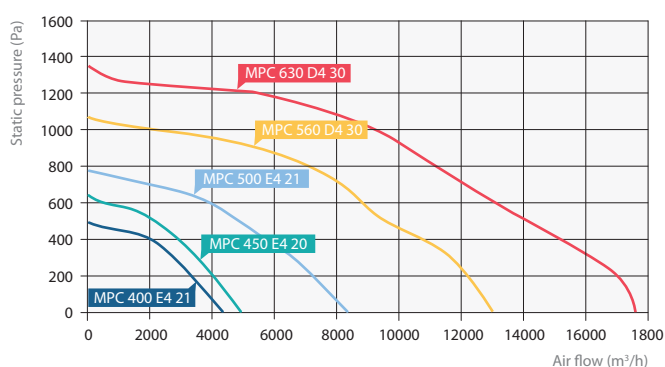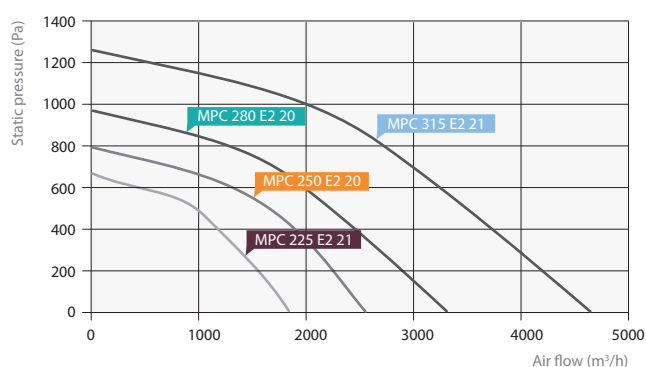

Model	Max. current consumption, A	Voltage, V	Power consumption, W	Code	Weight, kg
MPC 225 E2 21	2,3	1~ 230	303	721500378	32,9
MPC 250 E2 20	3,3	1~ 230	439	721511019	40,5
MPC 280 E2 20	4,0	1~ 230	675	721511021	43,0
MPC 315 E2 21	7,5	1~ 230	1232	721500366	69,5
MPC 400 E4 21	2,8	1~ 230	487	721500379	64,0
MPC 450 E4 20	4,4	1~ 230	767	721511025	72,0
MPC 500 E4 21	8,1	1~ 230	1423	721500380	112,0
MPC 560 D4 30	5,0	3~ 400	2688	1021820	134,0
MPC 630 D4 30	9,0	3~ 400	4520	1019692	144,0

5 steps motor rotation speed controller	Frequency inverters
RV-3.0	
RV-4.0	
RV-5.0	
RV-11.0	
RV-4.0	
RV-5.0	
RV-11.0	
	ODE-3-240095-3F42
	ODE-3-340140-3F42

ORDER EXAMPLE: fan MPC 225 E2 21.