


MPC-EC

Square acoustically insulated fan

Fans housings made of galvanized steel sheet, covered 30 mm. thick layer of insulation.

Technological highlights:

- EC motor, integrated control automatic,
- motor temperature control,
- acoustically insulated,
- possibility to change the fan outlet location.

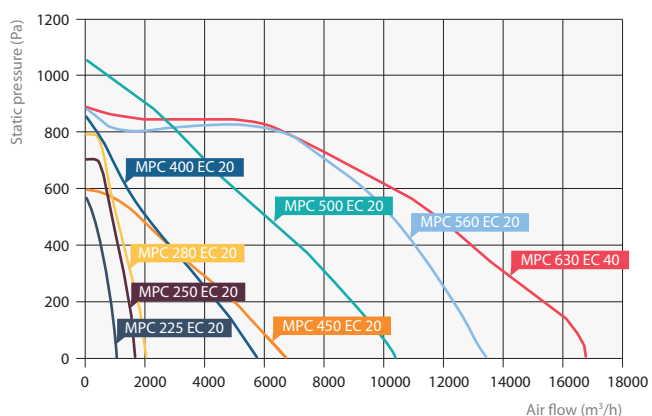

Model	Max. current consumption, A	Voltage, V	Power consumption, W	Code	Weight, kg
MPC-225 EC 20	0,99	1~ 230	116	1021821	27,7
MPC-250 EC 20	1,8	1~ 230	207	1021822	28,9
MPC-280 EC 20	1,9	1~ 230	270	1021823	29,1
MPC-400 EC 20	2,4	1~ 230	529	1021824	62,0
MPC-450 EC 20	2,4	1~ 230	527	1021825	65,0
MPC-500 EC 20	2,0	3~ 400	1319	721500359	113,5
MPC-560 EC 20	3,6	3~ 400	2355	1021826	122,6
MPC-630 EC 40	4,2	3~ 400	2714	1008496	127,1

ORDER EXAMPLE: fan MPC-225 EC 20.

EC fans potentiometer

EC-10