



MPS-D

Centrifugal kitchen fan

Fans housings made of galvanized steel sheet, covered 35 mm. thick layer of insulation.

Technological highlights:

- managed by frequency inverters,
- maximum air temperature 120 °C,
- motor meets the IP 54 protection class, insulation class – F.
- the motor is not directly exposed to air flow,
- with grease / condensate collection tray.

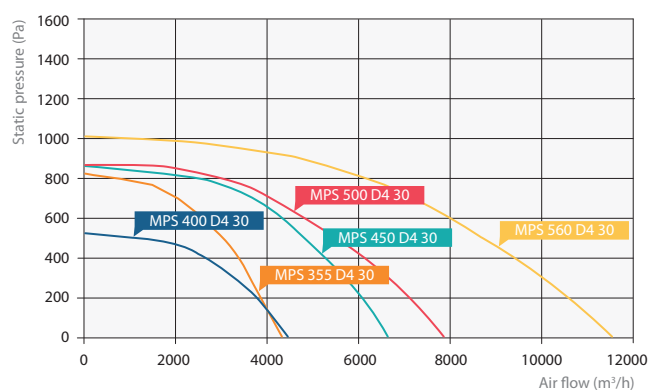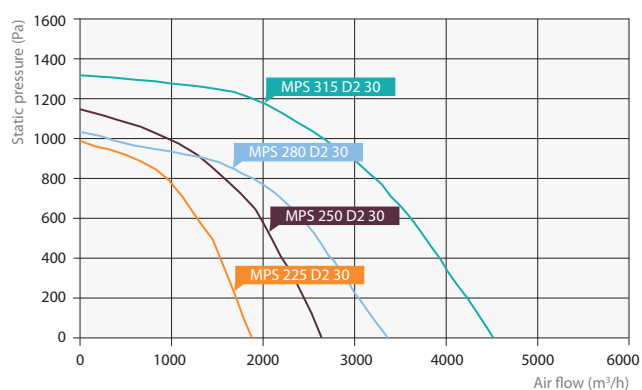

| Model | Max. current consumption, A | Voltage, V | Power consumption, W | Code | Weight, kg | Frequency inverters |
|---------------|-----------------------------|------------|----------------------|-----------|------------|---------------------|
| MPS-225 D2 30 | 0,91 | 3~ 400 | 486 | 1016854 | 29,3 | ODE-3-140022-3F12 |
| MPS-250 D2 30 | 1,3 | 3~ 400 | 756 | 1021856 | 38,0 | ODE-3-140041-3F12 |
| MPS-280 D2 30 | 1,3 | 3~ 400 | 759 | 1021857 | 38,5 | ODE-3-140041-3F12 |
| MPS-315 D2 30 | 2,4 | 3~ 400 | 1221 | 1007855 | 52,9 | ODE-3-140041-3F12 |
| MPS-355 D4 30 | 1,4 | 3~ 400 | 775 | 1021858 | 58,6 | ODE-3-140041-3F12 |
| MPS-400 D4 30 | 1,1 | 3~ 400 | 564 | 1021859 | 72,1 | ODE-3-140041-3F12 |
| MPS-450 D4 30 | 2,5 | 3~ 400 | 1278 | 723300689 | 74,9 | ODE-3-140041-3F12 |
| MPS-500 D4 30 | 3,0 | 3~ 400 | 1504 | 1021860 | 112,7 | ODE-3-140041-3F12 |
| MPS-560 D4 30 | 5,0 | 3~ 400 | 2577 | 1021861 | 115,0 | ODE-3-240095-3F42 |

ORDER EXAMPLE: fan MPS-225 D2 30.