



## MPS-E

### Centrifugal kitchen fan

Fans housings made of galvanized steel sheet, covered 35 mm. thick layer of insulation.

Technological highlights:

- adjustable speed,
- maximum air temperature 120 °C,
- motor meets the IP 54 protection class, insulation class – F.
- the motor is not directly exposed to air flow,
- with grease/condensate collection tray.

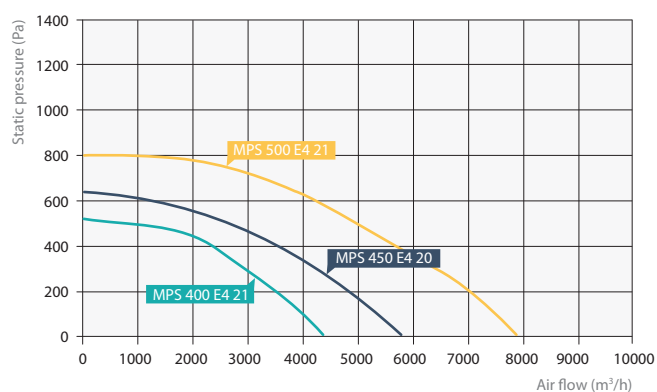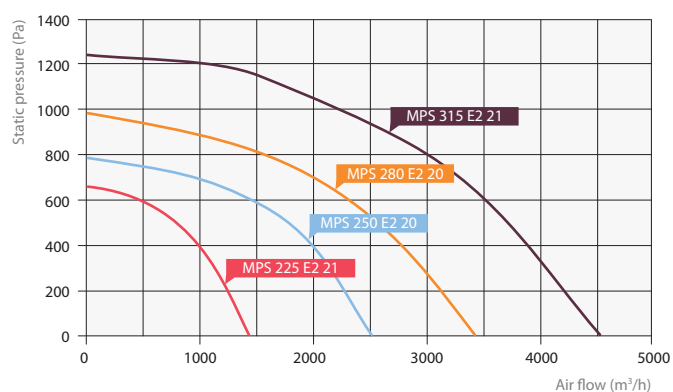

Model	Max. current consumption, A	Voltage, V	Power consumption, W	Code	Weight, kg
MPS-225 E2 21	2,3	1~ 230	287	1021852	33,0
MPS-250 E2 20	3,3	1~ 230	448	723343031	47,5
MPS-280 E2 20	4,1	1~ 230	722	723363369	47,5
MPS-315 E2 21	7,6	1~ 230	1292	723300670	54,5
MPS-400 E4 21	3,0	1~ 230	526	1021853	61,0
MPS-450 E4 20	4,7	1~ 230	849	723343037	67,0
MPS-500 E4 21	8,4	1~ 230	1505	1021854	105,0

5 steps motor rotation speed controller
RV-3.0
RV-5.0
RV-5.0
RV-11.0
RV-4.0
RV-7.0
RV-11.0

ORDER EXAMPLE: fan MPS-280 EC 20.