

OF, OFN

Rectangular ducts

OF-B×H-1500 galvanized steel


For product toughness and connections flanges are used

when $B \leq 1500$ mm $F = 20$ mm

when $1500 \text{ mm} < B \leq 2000$ mm $F = 30$ mm

when $B > 2000$ mm $F = 40$ mm

Standard galvanized steel ducts length $L = 1500$ mm.

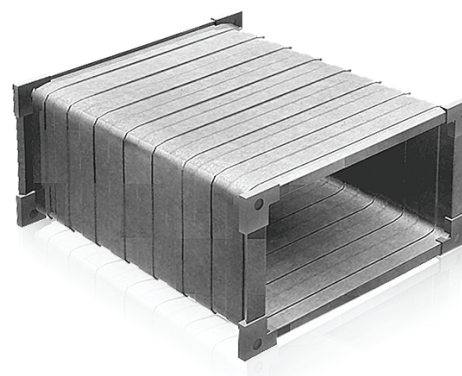

OFN-B×H-1250 nerūdijančio plieno


For product toughness and connections flanges are used

when $B \leq 1500$ mm $F = 20$ mm

when $1500 \text{ mm} < B \leq 2000$ mm $F = 30$ mm

when $B > 2000$ mm $F = 40$ mm

Standard length of stainless steel ducts $L = 1250$ mm.

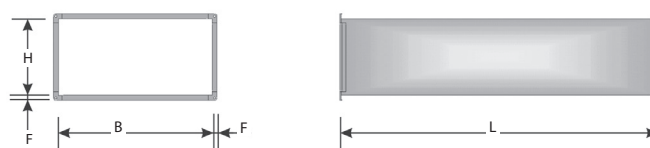

Rectangular ducts are made of AISI-304 stainless steel.

mm																									
B \ H	H	100	150	200	250	300	350	400	450	500	600	700	800	900	1000	1100	1200	1300	1400	1500	1600	1700	1800	1900	2000
	100																								
	150																								
	200																								
	250																								
	300																								
	350																								
	400																								
	450																								
	500																								
	600																								
	700																								
	800																								
	900																								
	1000																								
	1100																								
	1200																								
	1300																								
	1400																								
	1500																								
	1600																								
	1700																								
	1800																								
	1900																								
	2000																								

ORDER EXAMPLE: rectangular duct OF-100×100-1500.

ORDER EXAMPLE: stainless steel duct OFN-100×100-1250 AISI-304, stainless steel duct OFN-100×100-1250 AISI-316.