

PR-LDS

Connection box for slot diffuser



Made out of aluminium.

Connection boxes lined with flexible and heatresistant 9 mm thick rubber insulation mats.

Length 495 mm and 990 mm.

Connection boxes are supplied without dampers.

If required box can be ordered without insulation.

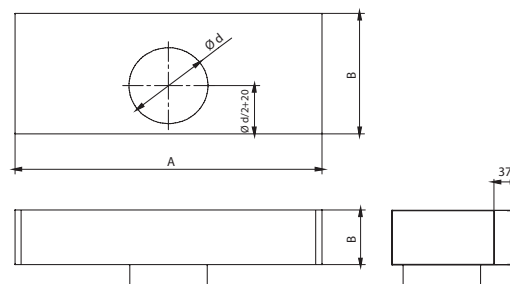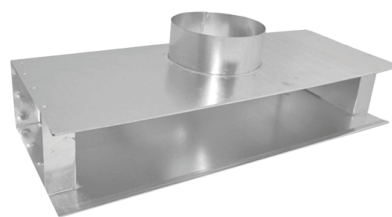

Model	Length, mm	A, mm	C, mm	B (for galvanized ducts connection box), mm	Number of connections for galvanized ducts	ød (for galvanized ducts connection box), mm	B (for flexible Flex ducts connection box), mm	Number of connections for flexible Flex ducts	ød (for flexible Flex ducts connection box), mm
PR-LDS-1	495	490	45	200	1	100	200	1	75
						125		2	75
						160		3	75
				250		200		1	90
				315		250		2	90
PR-LDS-2	495	490	90	200	1	100	200	0,00	90
						125		1	75
						160		2	75
				250		200		3	75
				315		250		1	90
PR-LDS-3	495	490	140	250	1	100	250	2	90
						125		3	90
						160		1	75
						200		2	75
				315		250		3	75
PR-LDS-2	990	985	90	200	1	100	200	1	75
						125		2	75
						160		3	75
				250		200		4	75
				315		250		1	90
PR-LDS-3	990	985	140	250	1	100	250	2	90
						125		3	90
						160		4	90
						200		1	75
				315		250		2	75
PR-LDS-4	990	985	185	250	1	100	250	3	75
						125		4	75
						160		1	90
						200		2	90
				315		250		3	90

ORDER EXAMPLE: Connection box for slot diffuser PR-LDS-1-495-K1-100-1.