


# RHP 1600 U C5

Nominal air flow, m <sup>3</sup> /h	1700
Nominal air flow, l/s	472
Electric air heater capacity, kW / Δt, °C	3 / 5,2
Supply voltage, V	3~400
Maximal operating current, A	14,4
Power supply cable, mm <sup>2</sup>	5×2,5
Electric power input of the fan drive at maximum flow rate, W	436
Noise power level, L <sub>WA</sub> , dB(A)	55
Noise pressure level, L <sub>PA</sub> , dB(A) (3 m)	45
Filters dimensions B×H×L, mm	805×400×46
Unit dimensions B×H×L, mm	905×905×1505
Panel thickness, mm	45
Maintenance space, mm	800
Refrigerant R134 A, kg	3,4
Unit weight, kg	270



## Performance



Unit with standard equipment

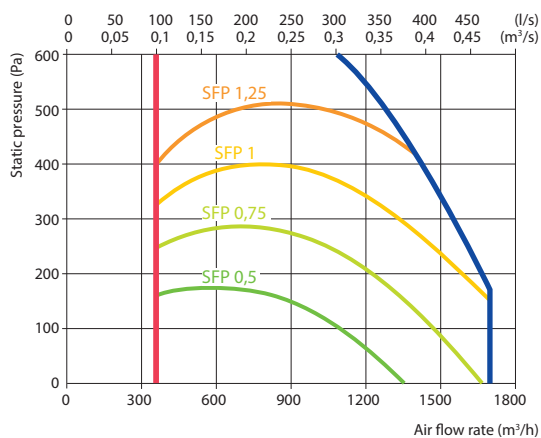


## Temperature efficiency

	Winter					Summer		
Outside temperature, °C	-23	-15	-10	-5	0	25	30	35
After heat exchanger, °C	12,4	14,1	15,1	16,2	17,3	22,6	23,7	24,8
Indoor +22°C, 20 % RH								

Shown as right (R1)

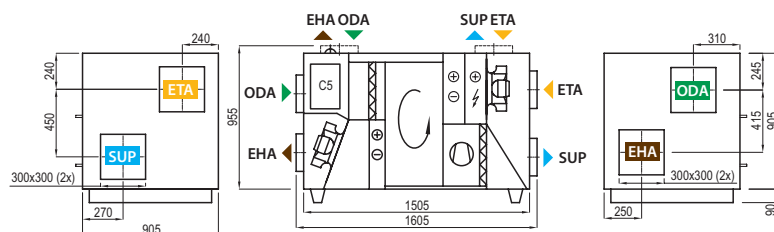

Shown as left (L1)

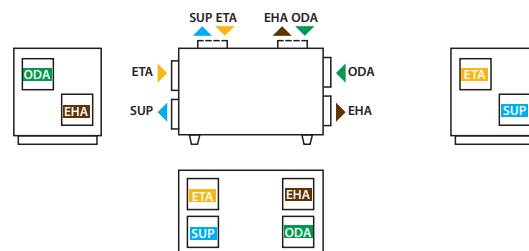


► ODA – outdoor intake    ► SUP – supply air    ► ETA – extract indoor    ► EHA – exhaust air


## Accessories

Closing damper	SRU-M-300x300+LF24/CM24
Silencer	ODA/EHA AGS-315-100-900-M
	SUP/ETA AGS-315-100-1200-M

## Heating mode

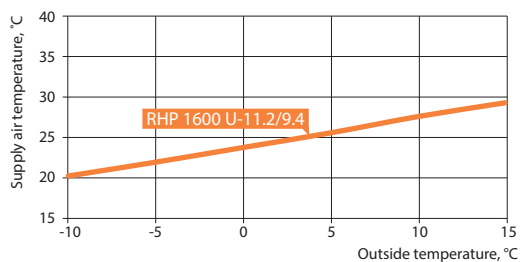

## Cooling mode

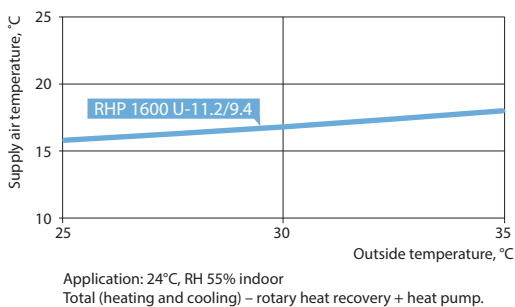

## Heat pump parameters

	RHP 1600 U 11.2/9.4				
	Heating			Cooling	
Outdoor temperature, °C	7	2	-7	35	27
Outdoor air related humidity, %	86	84	74	40	45
Indoor air temperature, °C	20	20	20	27	21
Indoor air related humidity, %	50	50	45	40	50
Supply air temperature, °C	26,3	24,4	21,1	18,9	13,6
Heat pump heating/cooling power, kW	5,26	4,79	3,99	5,73	5,42
Heat pump heating/cooling power consumption, kW	0,88	0,83	0,73	1,42	1,14
System SCOP <sup>1,2,3</sup> , Average climate / System SEER <sup>1,2,3</sup>	11,9			4,1	
COP/EER	5,95	5,79	5,5	4,04	4,74

<sup>1</sup> Rotary heat exchanger wave size "L"

<sup>2</sup> Rotary heat exchanger + heat pump

<sup>3</sup> According to EN 14825 standard