



# RS

## Circular duct mounted tube fans

RS fan housing made of metal, covered by powder coating RAL7035.

Technological highlights:

- speed controllable,
- integrated thermostatic switch,
- ball bearings increases the life span.

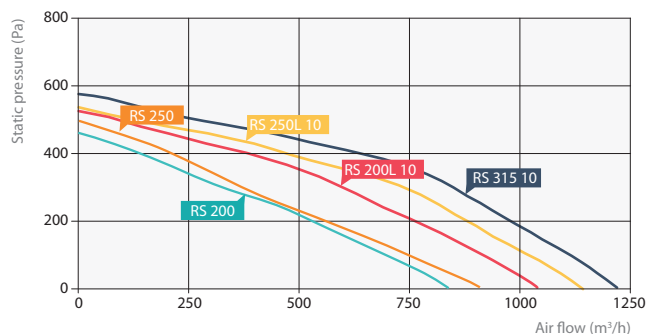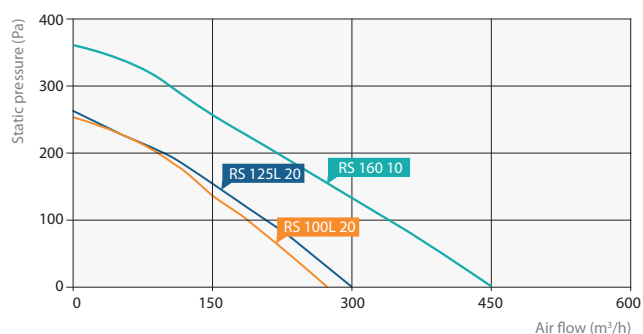

Model	Max. current consumption, A	Voltage, V	Power consumption, W	Code	Weight, kg
RS-100L 20	0,28	1~ 230	45	721000440	2,8
RS-125L 20	0,28	1~ 230	47	721000439	2,7
RS-160 10	0,31	1~ 230	49	721000401	3,0
RS-200	0,44	1~ 230	100	721040561	4,2
RS-200L 10	0,88	1~ 230	154	721000402	5,1
RS-250	0,46	1~ 230	100	721040562	4,3
RS-250L 10	0,88	1~ 230	161	721000403	5,1
RS-315 10	0,89	1~ 230	162	721000404	5,7

5 steps motor rotation speed controller
RV-0.6B
RV-0.6B
RV-0.6B
RV-0.6B
RV-1.2
RV-0.6B
RV-1.2
RV-1.2

ORDER EXAMPLE: fan RS-100L 20.