

SMR




Circular fire dampers UVA “Dry Montage” installation kit

Dry montage kit SMR is available for UVA dampers in dimensions Ø100, 125, 160, 200, 315 mm.

Using of the kit significantly facilitates the installation procedure making it mortarless and less labor-intensive.

The kit consists of:

- Two C-shape parts – 1 set Shield flanges made of 40 mm thick Promatect-MT fire-resistant material Promatect-MT fire-resistant material (2 pcs.)
- Two C-shape parts – 1 set Shield flanges made of 20 mm thick Promatect-MT fire-resistant material (2 pcs.)
- Metal corner for joining shield flanges to the casing of the damper to the casing of the damper (2 pcs.)
- Promaseal – GT intumescent tape for filling the gap between shield flange and casing DIN 967
- M4x8 screw to install metal corners on the casing (2 pcs.)
- ISO 7049 3.5x13 screw to attach shield flange to the metal corner (2 pcs.)
- Construction screw 4.0x30 for joining together shield flange parts (4 pcs.)

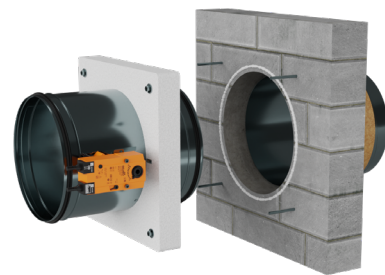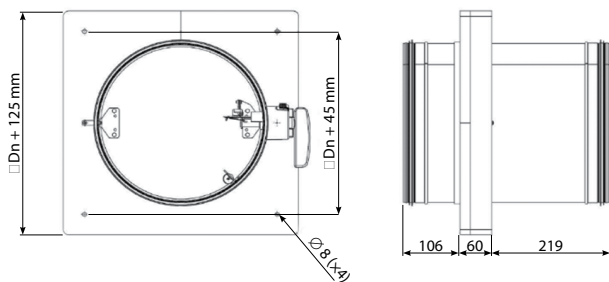

Product	Diameter D
SMR-100	100
SMR-125	125
SMR-160	160
SMR-200	200
SMR-250	250
SMR-315	315