

TRT, TRTN


T-piece

T-pieces are designed to connect different or same diameter circular ducts. TRT-D-d T-piece connects main line with secondary line in 90 degrees angle. TRT-45-D-d T-piece connects main line with secondary line in 45 degrees angle. TRKT-D-d is used when main line is splitted into two separate lines. T-piece units are made from galvanized sheet metal with insertable connections to duct.

On demand:

TRTN-D-d, TRTN-45-D-d, TRKTN-D-d can be made from AISI-304 or AISI-316 stainless steel.

TRTC-D-d, TRTC-45-D-d, TRKTC-D-d from galvanized sheet metal covered with powder coating for outdoor use.

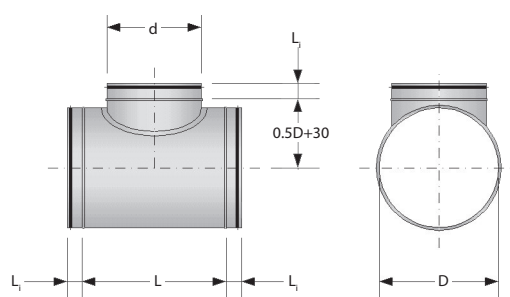

Dimensions, mm					TRT	
D	d	L ₁ (D)	L ₁ (d)	L	Code	Weight, kg
100	100	40	40	220	353931120	0,5
125	100	40	40	220	353931122	0,6
	125	40	40	245	353931125	0,7
160	100	40	40	220	353931162	0,7
	125	40	40	245	353931164	0,8
	160	40	40	280	353931160	1,0
200	100	40	40	220	353931210	0,9
	125	40	40	245	353931212	1,0
	160	40	40	280	353931216	1,2
	200	40	40	320	353931200	1,4
250	100	40	40	220	353931252	1,1
	125	40	40	245	353931251	1,2
	160	40	40	280	353931253	1,4
	200	40	40	320	353931254	1,6
	250	40	40	370	353931250	1,9
315	100	40	40	220	353931300	1,3
	125	40	40	245	704661187	1,5
	160	40	40	280	353931316	1,6
	200	40	40	320	353931314	1,9
	250	40	40	370	353931315	2,2
	315	40	40	435	353931313	2,7

Dimensions, mm					TRT	
D	d	L ₁ (D)	L ₁ (d)	L	Code	Weight, kg
400	160	65	40	290	704661189	3,2
	200	65	40	330	353931405	3,5
	250	65	40	380	353931410	3,9
	315	65	40	445	353931415	4,6
	400	65	65	530	353931400	6,1
500	160	65	40	370	704661190	4,6
	200	65	40	410	704661191	5,0
	250	65	40	460	35393146	5,5
	315	65	40	525	353931470	6,2
	400	65	65	610	353931503	7,7
	500	65	65	710	353931500	9,3
630	160	65	40	370	704661192	5,7
	200	65	40	410	353931550	6,2
	250	65	40	460	353931552	6,8
	315	65	40	525	353931560	7,6
	400	65	65	610	353931565	9,2
	500	65	65	710	704661193	11,0