

## UVAFM

### Circular fire damper with actuator


Certified fire dampers signed with CE mark.

On demand can be made of stainless steel (AISI 304 or AISI 316L).

T actuator equipped with Thermal tripping device.

T-ST actuator equipped with Thermal tripping device and connection plugs.

Fire resistance EI 60S for montage in the solid or flexible wall, EI 90S for montage in the ceiling.

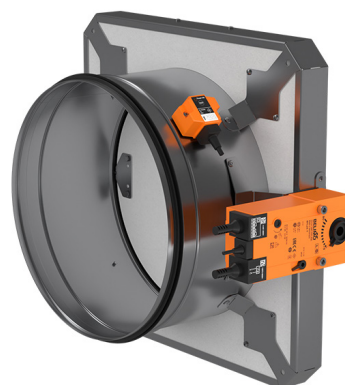

Diameter D	Length, mm	Insertable part length L <sub>r</sub> , mm	Weight, kg	Actuator (24T)	Actuator (24T-ST)	Actuator (230T)
				Code		
100	247	40	3,3	1109856	1109862	1109869
125	247	40	3,7	1109857	1109863	1109870
160	247	40	4,3	1109858	1109864	1109871
200	247	40	5,0	1109859	1109865	1109872
250	247	40	6,7	1109860	1109866	1109873
315	247	40	7,4	1109861	1109867	1109875