

UVSL-H

Rectangular fire dampers with double blade


Dampers with fusible link (H).

Flange F = 30 mm.

Certified fire dampers signed with CE mark.

Fuse triggering temperature 70 °C.

Fire dampers on request can be equipped with end position switches.

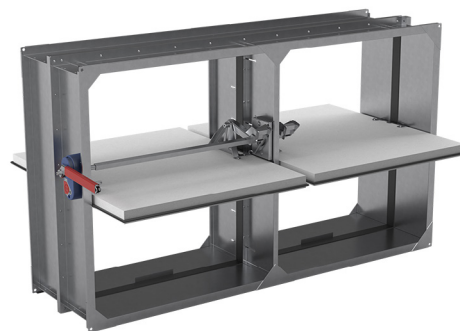

B – width, mm	H – height, mm	L – length, mm
1000 ÷ 1600	200 ÷ 1000	400