


# Verso R 1500 U C5

Nominal air flow according to ErP 2018, m <sup>3</sup> /h	1700
Nominal air flow according to ErP 2018, l/s	472
Electric air heater capacity, kW / Δt, °C	4,5/7,7
Supply voltage HE, V	3~400
Supply voltage HW, V	1~230
Maximal operating current HE, A	13,3
Maximal operating current HW, A	7,1
Power supply cable E, mm <sup>2</sup>	5×2,5
Power supply cable W, mm <sup>2</sup>	3×1,5
Electric power input of the fan drive at maximum flow rate, W	358
Noise power level, L <sub>WA</sub> , dB(A)	54
Noise pressure level, L <sub>PA</sub> , dB(A), (3 m)	44
Filters dimensions B×H×L, mm	800×400×46
Unit dimensions B×H×L, mm	906×905×1355
Panel thickness, mm	50
Maintenance space, mm	800
Unit weight, kg	206

## Performance

Verso R 1500 UH with standard equipment

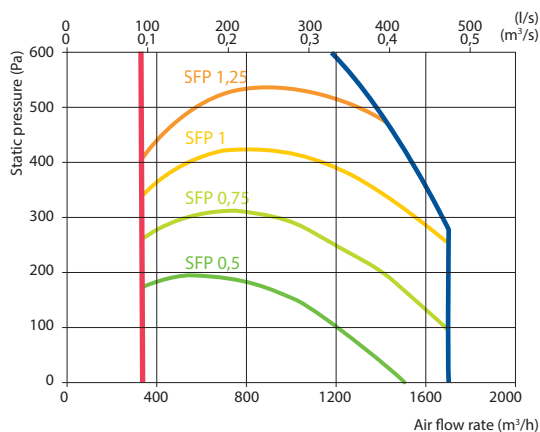

Does not conform to ErP2018 requirements

## Accessories

Closing damper	AGUJ-M-315+LF24/LM24
Silencer	ODA/EHA AGS-315-100-900-M SUP/ETA AGS-315-100-1200-M
PPU	PPU-HW-3R-15-1,6-W2
Water cooler	DCW-1,4-9
2-way valve	VVP47.20-4,0+SSF161.05HF
DX cooler	DCF-1,4-10
Cooling unit	MOU 36HFN8a+KA8140



## Temperature efficiency

	Winter					Summer		
Outside temperature, °C	-23	-15	-10	-5	0	25	30	35
After heat exchanger, °C	11,7	13,5	14,7	15,8	17,0	22,7	23,8	25,0


Indoor +22 °C, 20 % RH

## Changeover water/ DX heating – cooling exchanger (HCW/HCDX)


	Winter	Summer	Winter	Summer
Water temperature in/out, °C	60/40	7/12	–	–
Condensation/evaporation T, °C	–	–	45	45/5
Capacity, kW	5,9	10,1	5,9	11,7
Maximal capacity, kW	12,3	10,5	8,2	12,2
Pressure drop, kPa	1	9,8	–	–
Air temperature in/out, °C	11,7 / 22	30 / 18	11,7 / 22	30 / 18
Connection, " / mm	¾		½ / 22	

Summer: +30 °C / 50 %; HCW – 1500 m<sup>3</sup>/h

## Shown as right (R1)

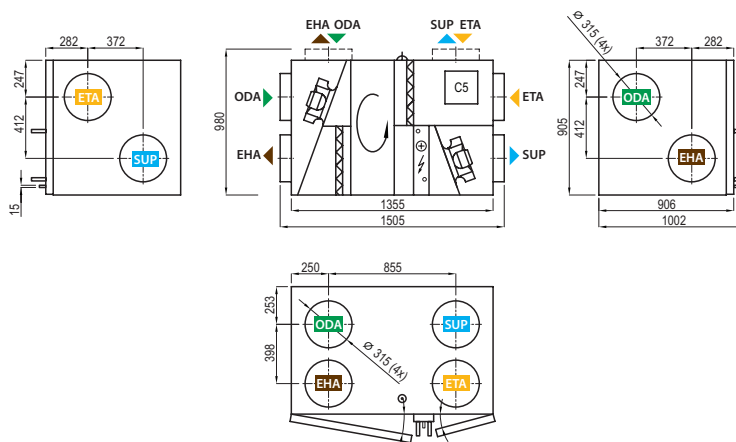

## Shown as left (L1)

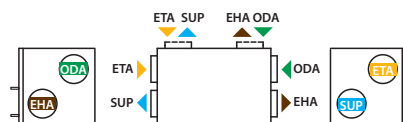

ODA – outdoor intake   SUP – supply air   ETA – extract indoor   EHA – exhaust air