


# RHP 1200 U C5

Nominal air flow, m <sup>3</sup> /h	1300
Nominal air flow, l/s	361
Electric air heater capacity, kW / Δt, °C	3 / 6,7
Supply voltage, V	3~400
Maximal operating current, A	12,2
Power supply cable, mm <sup>2</sup>	5×2,5
Electric power input of the fan drive at maximum flow rate, W	277
Noise power level, L <sub>WA</sub> , dB(A)	50
Noise pressure level, L <sub>PA</sub> , dB(A) (3 m)	40
Filters dimensions B×H×L, mm	805×400×46
Unit dimensions B×H×L, mm	905×905×1505
Panel thickness, mm	45
Maintenance space, mm	850
Refrigerant R134 A, kg	3,4
Unit weight, kg	270



## Performance

Unit with standard equipment


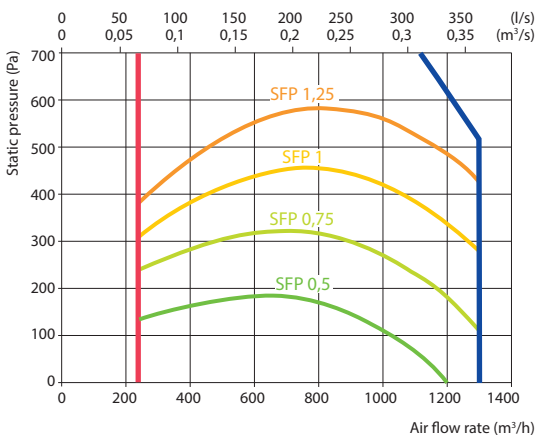


## Temperature efficiency


	Winter				Summer			
Outside temperature, °C	-23	-15	-10	-5	0	25	30	35
After heat exchanger, °C	13,5	15,0	15,9	16,9	17,8	22,6	23,5	24,5

Indoor +22°C, 20 % RH

Shown as right (R1)

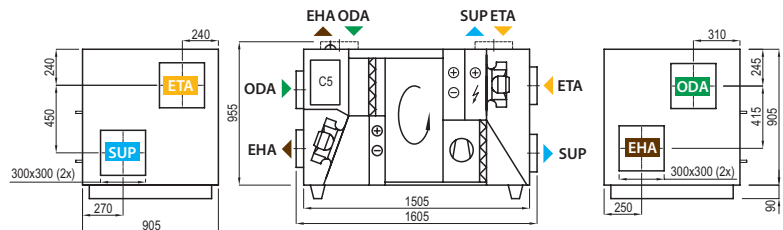

Shown as left (L1)

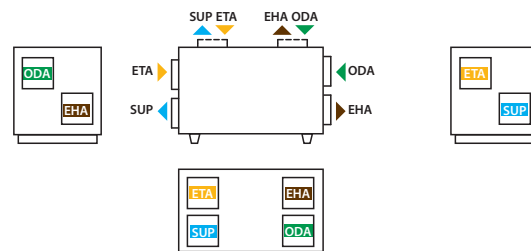


▶ ODA – outdoor intake    ▶ SUP – supply air    ▶ ETA – extract indoor    ▶ EHA – exhaust air

## Accessories


Closing damper	SRU-M-300x300+LF24/CM24
Silencer	ODA/EHA AGS-315-100-900-M SUP/ETA AGS-315-100-1200-M

## Heating mode

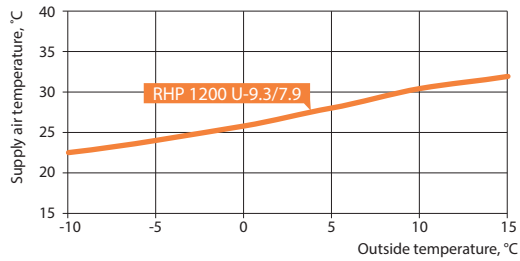

Application: 20°C, RH 45% indoor.

## Cooling mode

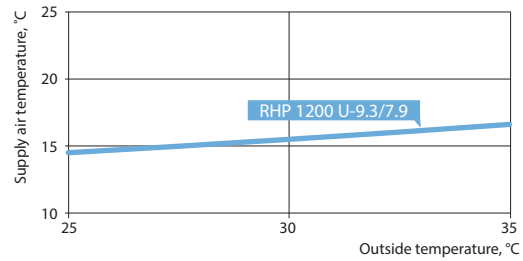Application: 24°C, RH 55% indoor  
Total (heating and cooling) – rotary heat recovery + heat pump.

## Heat pump parameters

	RHP 1200 U 9.3/7.9				
	Heating			Cooling	
Outdoor temperature, °C	7	2	-7	35	27
Outdoor air related humidity, %	86	84	74	40	45
Indoor air temperature, °C	20	20	20	27	21
Indoor air related humidity, %	50	50	45	40	50
Supply air temperature, °C	29,1	27,0	23,9	17,1	12,2
Heat pump heating/cooling power, kW	5,11	4,61	3,92	5,31	5,11
Heat pump heating/cooling power consumption, kW	0,97	0,89	0,82	1,51	1,24
System SCOP <sup>1,2,3</sup> , Average climate / System SEER <sup>1,2,3</sup>	10,45			4,08	
COP/EER	5,27	5,17	4,75	3,51	4,13

<sup>1</sup> Rotary heat exchanger wave size "L"<sup>2</sup> Rotary heat exchanger + heat pump<sup>3</sup> According to EN 14825 standard