


Domekt R 400 H C6M

Maximal air flow, m ³ /h	500
Maximal air flow, l/s	139
Reference flow rate, m ³ /s	0,087
Reference pressure difference, Pa	50
SPI, W/(m ³ /h)	0,28
Thermal efficiency of heat recovery, %	84
Electric air heater capacity, kW / Δt, °C	1/8,4
Supply voltage, V	1~230
Maximal operating current HE, A	7,3
Power supply cable, mm ²	3×1,5
Electric power input of the fan drive at maximum flow rate, W	125
Electric power input of the fan drive at reference flow rate, W	52
Noise power level, L _{WA} , dB(A)	44
Noise pressure level, L _{PA} , dB(A), (3 m)	32
Filters dimensions B×H×L, mm	417×210×46
Unit dimensions B×H×L, mm	515×567×660
Maintenance space, mm	650
Unit weight, kg	49



Performance

Unit with standard equipment

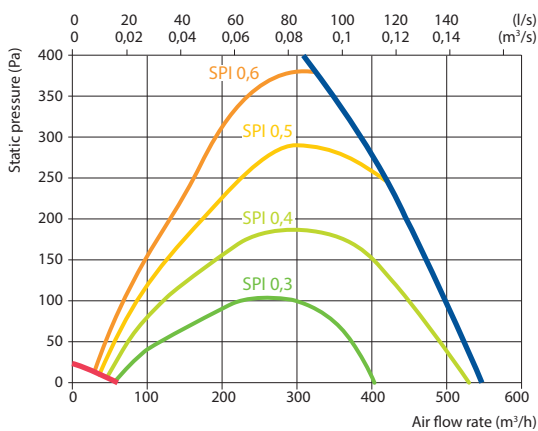


Temperature efficiency

	Winter					Summer		
Outdoor temperature, °C	-23	-15	-10	-5	0	25	30	35
After heat exchanger, °C	14,9	16,2	17	17,7	18,5	22,5	23,3	24

indoor +22 °C, 20 % RH


Shown as right (R1)

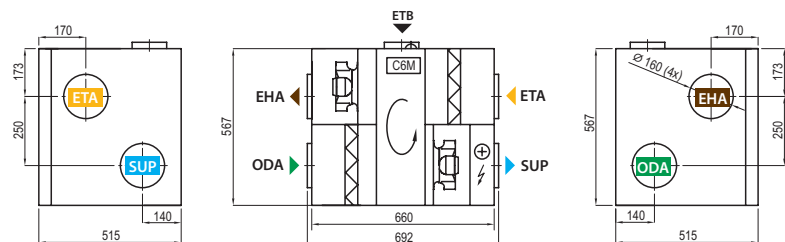

Accessories

Closing damper	AGUJ-M-160+LF230/CM230	
Silencer	ODA/EHA	AGS-160-50-600-M
	SUP/ETA	AGS-160-50-900-M
Water heater	DH-160	
PPU	PPU-HW-3R-15-0,4-W2	
2-way valve (heater)	VVP47.10-0,4+SSF161.05HF	
Water cooler	DCW-0,4-3	
2-way valve (cooler)	VVP47.10-1,6+SSF161.05HF	
Outdoor grill	LD-160	
Water heater-cooler	DHCW-160	
DX cooler	DCF-0,4-3	
Cooling unit	MOU-12HFN8a+KA8140	

Shown as left (L1)

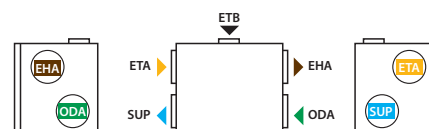

▶ ODA – outdoor intake ▶ SUP – supply air ▶ ETA – extract indoor ▶ EHA – exhaust air ▶ ETB – additional extraction connection (by-pass – extraction without heat recovery)